


**FUNCTION SELECTOR SWITCH  
DOWN IN TUNER POSITION  
SWITCH SEQUENCE**

- 1- TUNER
  - 2- CRYSTAL INPUT
  - 3- LOW IMPEDANCE MIC
  - 4- HIGH LEVEL MAGNETIC
  - 5- LOW LEVEL MAGNETIC

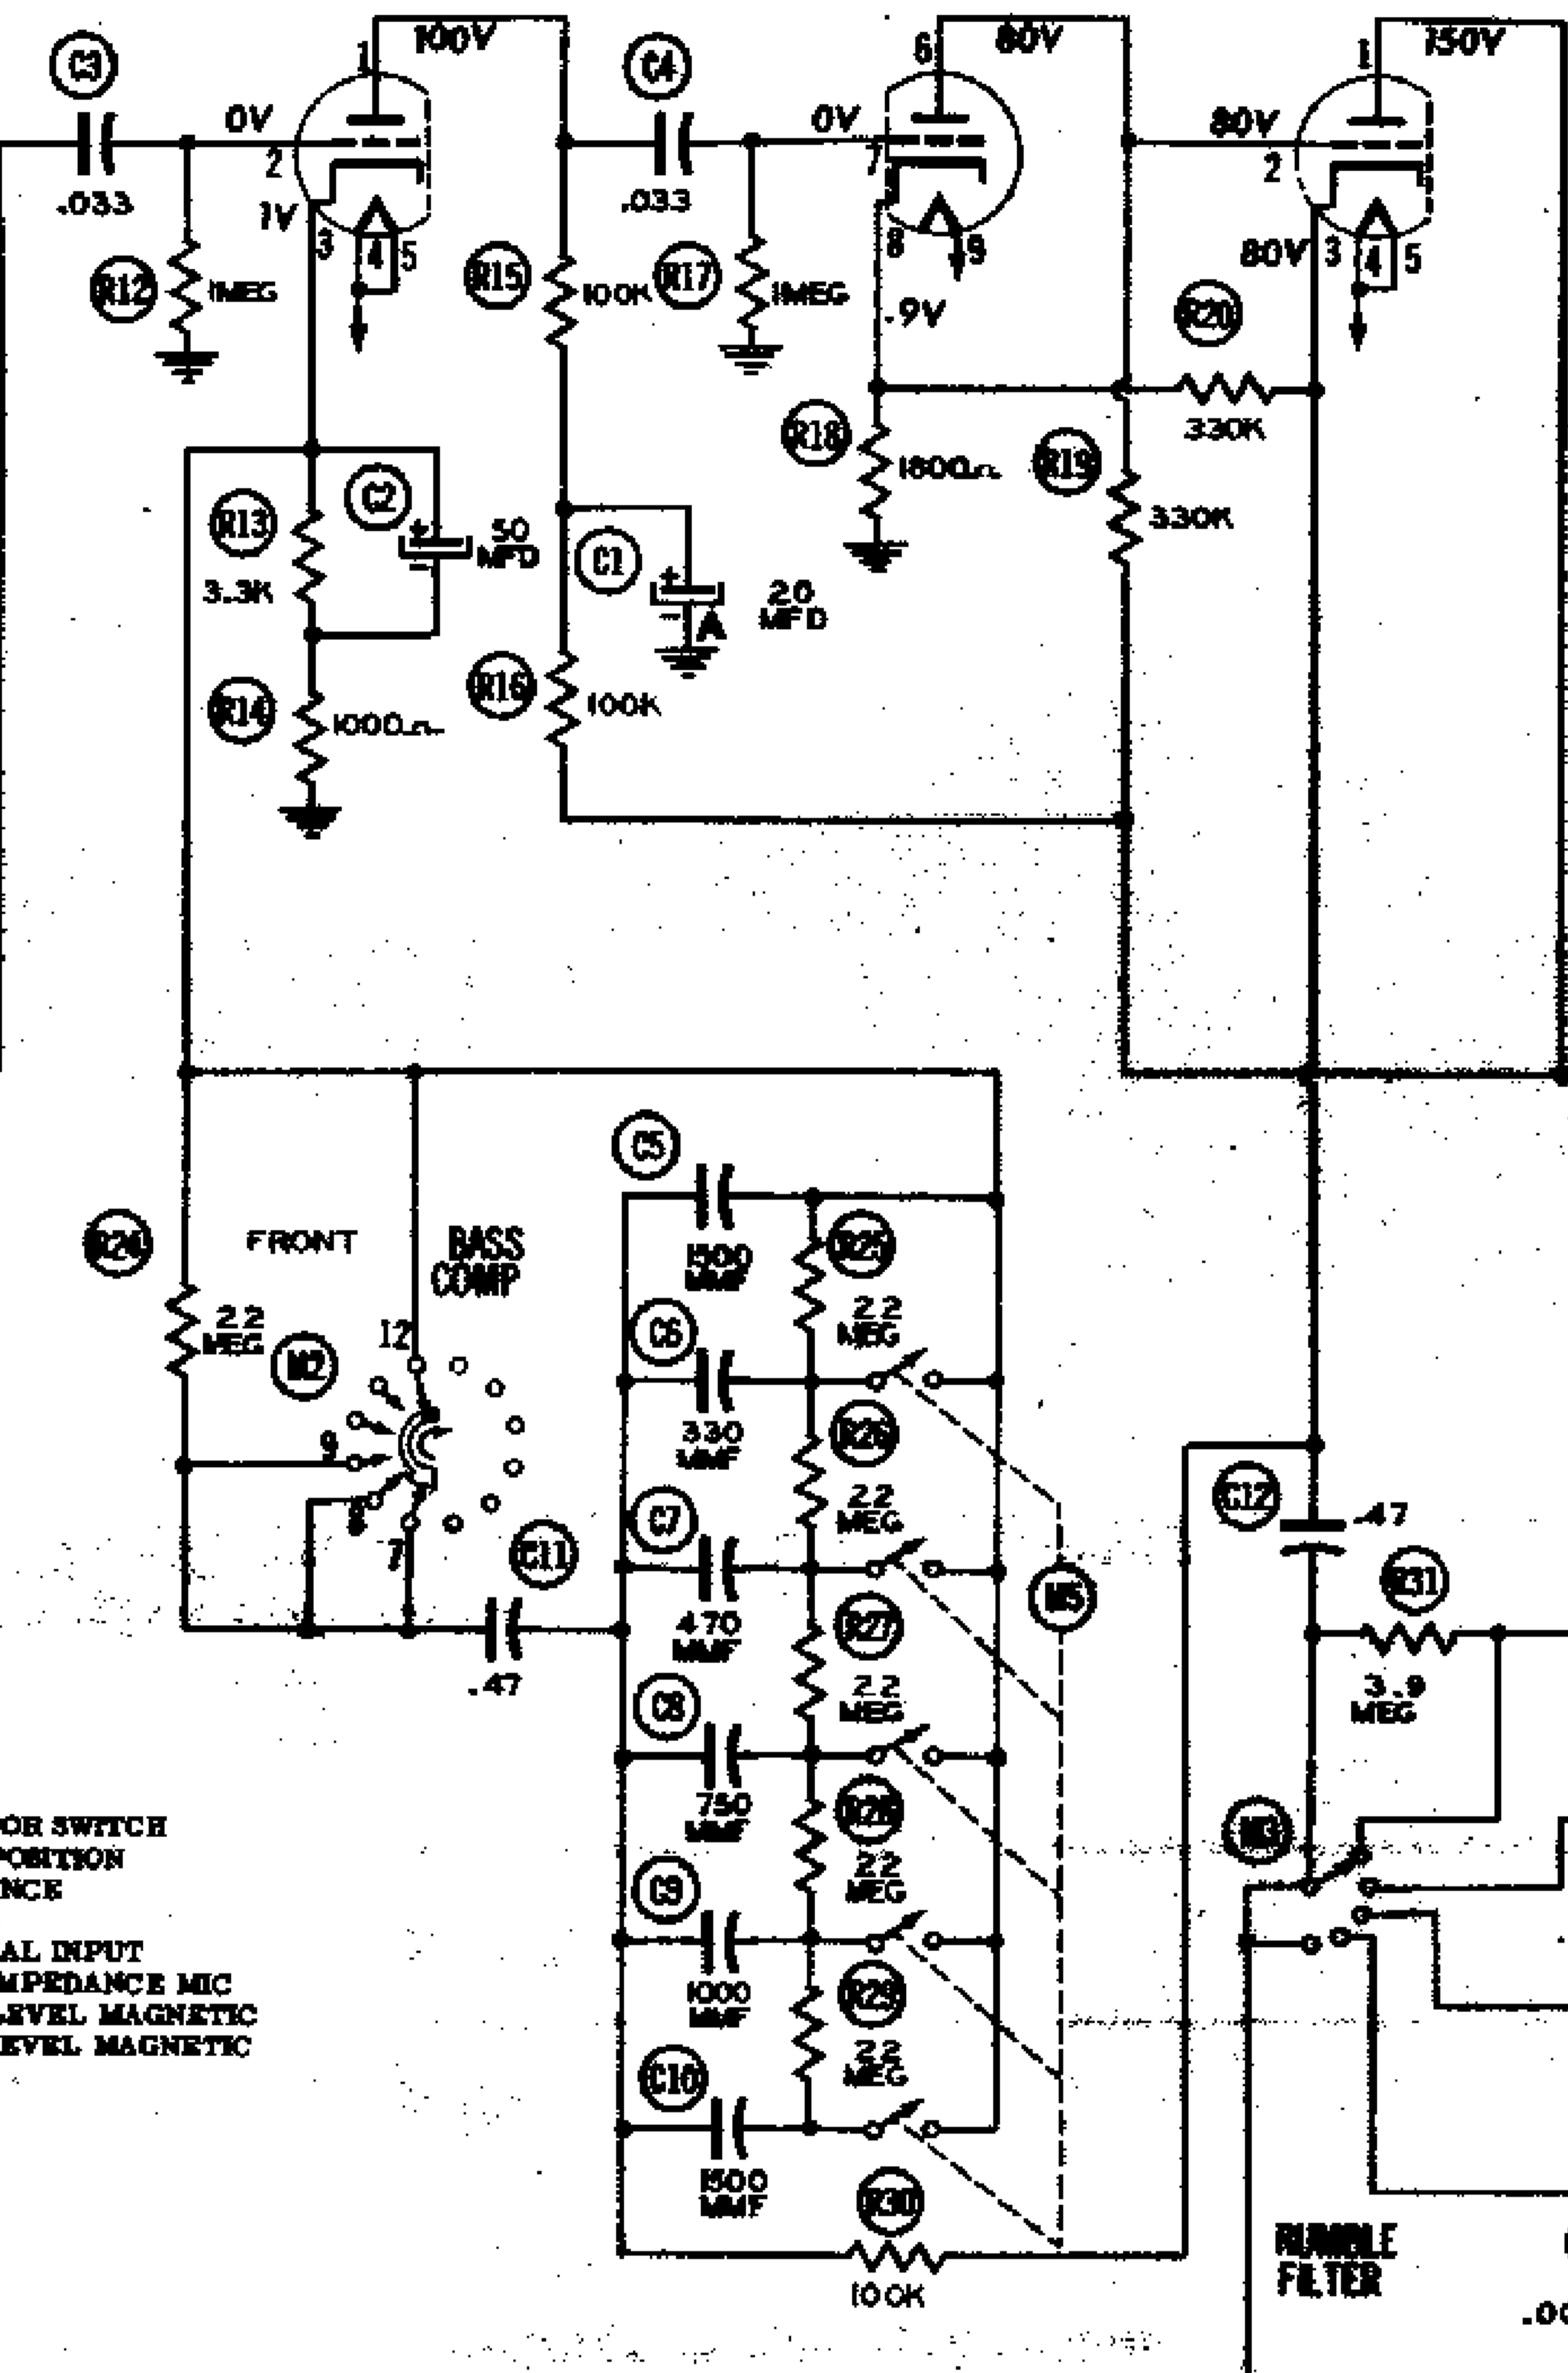


**THE COOPERATION OF THE MANUFACTURER OF THIS EQUIPMENT MAKES IT POSSIBLE TO BRING YOU THIS SERVICE**

#### **RESISTANCE READINGS**

Item	Tube	Pin 1	Pin 2	Pin 3	Pin 4	Pin 5	Pin 6
V 1	12AX7	+310KΩ	1Meg	4.3KΩ	2Ω	2Ω	+440KΩ
V 2	12AX7	+110KΩ	+440KΩ	330KΩ	2Ω	2Ω	+110KΩ
V 3	12AX7	+440KΩ	10KΩ	1.8KΩ	2Ω	2Ω	+10KΩ

VOLTAGE MEASUREMENTS MADE USING 350VDC SOURCE FOR

- MEASURED FROM PIN 7 OF OUTPUT PLUG
  - + MEASURED FROM PIN 4 OF OUTPUT PLUG




## STANCE FEATURES

3	Pin 4	Pin 5	Pin 6	Pin 7	Pin 8	Pin 9
$\Omega$	$2\Omega$	$2\Omega$	$+440K\Omega$	$1Meg$	$1.8K\Omega$	$3\Omega$
$\Omega$	$2\Omega$	$2\Omega$	$+110K\Omega$	$200K\Omega$	$100K\Omega$	$3\Omega$
$\Omega$	$2\Omega$	$2\Omega$	$+10K\Omega$	$100K\Omega$	$100K\Omega$	$3\Omega$

TESTS MADE USING 350VDC SOURCE FOR B+

**AS SHOWN**

1. DC voltage measurements taken with vacuum tube voltmeter.  
AC voltages measured at 1000 ohms per volt.
  2. Socket connections are shown as bottom views.
  3. Measured values are from socket pin to common ground.
  4. Line voltage maintained at 117 volts for voltage readings.
  5. Nominal tolerance on component values makes possible variation of  $\pm 15\%$  in voltage and resistance readings.
  6. All controls at minimum, proper output load connected.



1. DC voltage measurements taken with VACUUM type voltmeter;  
AC voltages measured at 1000 ohms per volt.
  2. Socket connections are shown as bottom views.
  3. Measured values are from socket pin to common negative.
  4. Line voltage maintained at 117 volts for voltage readings.
  5. Nominal tolerances on component values makes possible a variation of  $\pm 10\%$  in voltage and resistance readings.
  6. All controls at minimum, power output load connected.