

# REK-O-KUT



**PROFESSIONAL TURNTABLE PRODUCTS**

6501



1568 NORTH SIERRA VISTA, FRESNO, CALIF. 93703 • Phone 209-251-4213  
A Subsidiary of CCA Electronics Corp. Gloucester City, New Jersey 08030

## B12-71 Hi-Fi Broadcast Turntable



The Rek-O-Kut Model B12-71 is the first broadcast designed turntable available to the discerning high fidelity and professional user. This precision turntable was developed primarily for the critical standards of the broadcast industry where reliability, instant start, and highest performance is required. The B12-71 is an improved version of the B12-H utilizing a patented 3 speed gear shift level action, coupled with the unique Rek-O-Kut capstan mechanism. The shift lever is conveniently placed for the user, whether on a shelf base (model BH) or free standing (model FBH).

## Hi-Fi B-12H Professional Turntable



The Rek-O-Kut Model B-12H is the standard of the professional industry. Unbelievable care is expended to insure that all parts are machined and assembled to a tolerance that assures freedom from wow, rumble and flutter, and yet achieves extremely fast start up time and constant speed of operation.

The Rek-O-Kut Model B-12H-4 is identical to the B-12H save for a substitution of the constant speed hysteresis synchronous motor with a four pole induction motor. This results in somewhat higher starting torque, slightly less speed regulation, but a reasonable reduction in initial cost.

## SPECIFICATIONS

Rumble (below NAB ref.) . . . . .	-40 db
(below weighted level) . . . . .	-65 db
Speeds - (RPM). . . . .	33 1/3, 45, 78
Wow & Flutter . . . . .	0.05%
Motor . . . . .	Hys. Sync.
Weight (net) . . . . .	16 lbs.
Depth . . . . .	15 3/4"
Width . . . . .	15 1/4"
Height (below surface) . . . . .	6"


## SPECIFICATIONS

	B-12H	B-12H-4
Rumble (to NAB Standard)	-39 db	-37 db
(Below Average Recording Level)	-62 db	-60 db
Speeds (RPM)	33 1/3, 45, 78	33 1/3, 45, 78
Wow and Flutter	0.09%	0.09%
Motor	Hysteresis Sync.	Four Pole Induction
Weight	14 lbs.	15 lbs.
Depth (Front to Back)	14"	14"
Width	15 11/16"	15 11/16"
Height (Above Mounting Surface)	1 9/16"	1 9/16"
(Below Mounting Surface)	4 1/8"	4 1/2"
Starting Time	1/6th revolution	1/8th revolution
Line Voltage	115V/230V	115V/230V



A Subsidiary of CCA Electronics Corp.

## CVS - 12 Variable Speed Turntable

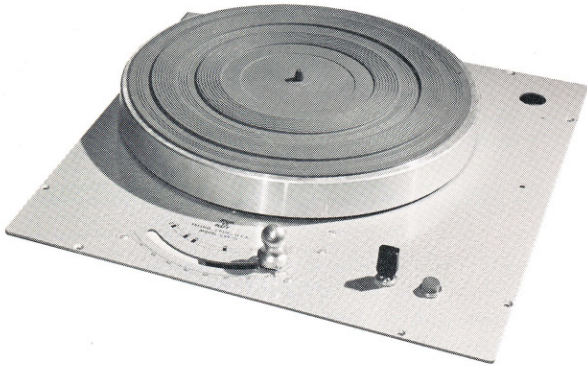

The Rek-O-Kut Model CVS-12 is a precision continuously variable speed, rugged turntable with all of the operating performance specifications of a professional, discrete speed unit.

The CVS-12 has tremendous application in the sound effects field where events such as the changing speed of an automobile, the roar of a missile, or a host of other aural techniques can be simulated by simply continuously changing the speed of the platter from the normal recorded speed of the platter to other values either slower or faster.

In addition, this rugged device can be used on a consistent basis by nonprofessional people to assist in "musical instrument teaching", dance instruction, "Callers" in a square dance, or commercial amusement and sport centers.

The CVS-12 Turntable is available independently or can be supplied at an optional price with a custom base, a type S-320 Tone Arm, and a QRK Stereo Cartridge, type F3. This system is identified by the Model No. CVS-12S.

## SPECIFICATIONS

Speed	-	Continuously Variable @ 60 cycles from 16 RPM to 100 RPM @ 50 cycles from 16 RPM to 85 RPM
Wow	-	.098% Max.
Rumble	-	-35 DB
Flutter	-	.085% Max.

### DIMENSIONS

	CVS-12	CVS-12S
Weight	15 lbs.	22 lbs.
Width	15"	15"
Height	5"	6"
Depth	16"	16"
Gross Cubage	1½ Cu. Ft.	2 Cu. Ft.

## Rek-O-Kut Furniture


### Walnut Bases



SHELF Type  
(with B-12H)

### Model BH

### Model FBH

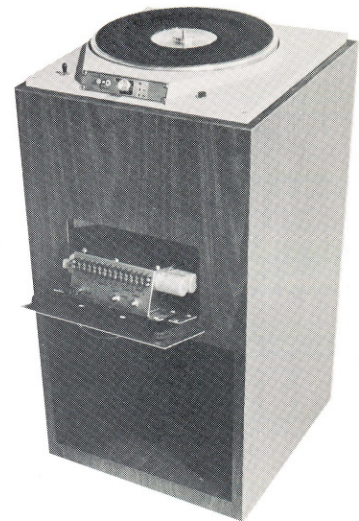

FREE STANDING  
(with QRK-12C)

Rek-O-Kut offers a complete line of furniture designed to enhance the excellent performance of Rek-O-Kut turntables and tone arms. These include both table top and free standing units.

### DIMENSIONS (W x H x D)

Model BH	16 5/16" x 4" x 14 3/4"
Model FBH	16 3/8" x 30" x 16 3/4"



A Subsidiary of CCA Electronics Corp.

## B12-71 Hi-Fi Broadcast Turntable



The Rek-O-Kut Model B12-71 is the first broadcast designed turntable available to the discerning high fidelity and professional user. This precision turntable was developed primarily for the critical standards of the broadcast industry where reliability, instant start, and highest performance is required. The B12-71 is an improved version of the B12-H utilizing a patented 3 speed gear shift level action, coupled with the unique Rek-O-Kut capstan mechanism. The shift lever is conveniently placed for the user, whether on a shelf base (model BH) or free standing (model FBH).

## SPECIFICATIONS

Rumble (below NAB ref.) . . . . .	-40 db
(below weighted level) . . . . .	-65 db
Speeds - (RPM). . . . .	33 1/3, 45, 78
Wow & Flutter . . . . .	0.05%
Motor . . . . .	Hys. Sync.
Weight (net) . . . . .	16 lbs.
Depth . . . . .	15 3/4"
Width . . . . .	15 1/4"
Height (below surface) . . . . .	6"



A Subsidiary of CCA Electronics Corp.

## Hi-Fi B-12H Professional Turntable



The Rek-O-Kut Model B-12H is the standard of the professional industry. Unbelievable care is expended to insure that all parts are machined and assembled to a tolerance that assures freedom from wow, rumble and flutter, and yet achieves extremely fast start up time and constant speed of operation.

The Rek-O-Kut Model B-12H-4 is identical to the B-12H save for a substitution of the constant speed hysteresis synchronous motor with a four pole induction motor. This results in somewhat higher starting torque, slightly less speed regulation, but a reasonable reduction in initial cost.

## SPECIFICATIONS

	B-12H	B-12H-4
Rumble (to NAB Standard) (Below Average Recording Level)	-39 db -62 db	-37 db -60 db
Speeds (RPM)	33 1/3, 45, 78	33 1/3, 45, 78
Wow and Flutter	0.09%	0.09%
Motor	Hysteresis Sync.	Four Pole Induction
Weight	14 lbs.	15 lbs.
Depth (Front to Back)	14"	14"
Width	15 11/16"	15 11/16"
Height (Above Mounting Surface) (Below Mounting Surface)	1 9/16" 4 1/8"	1 9/16" 4 1/2"
Starting Time	1/6th revolution	1/8th revolution
Line Voltage	115V/230V	115V/230V

# PROFESSIONAL TONE ARMS AND ACCESSORIES




**Model S-260 - 16"**


**Model S-320 - 12"**

Meets and exceeds the critical requirements of the ultra-high compliance cartridges. Tracks at 1 gram or less - CONSTRUCTION: tubular aluminum. Die-cast cartridge shell - TRACKING ERROR: under 1° - HORIZONTAL MOVEMENT: maximum freedom achieved by bearing made of inner and outer races and two rows of hardened steel balls into which shaft of arm fits - VERTICAL MOVEMENT; friction-free movement is achieved by suspending arm in gimbal using a cross-shaft at each end of which are five 1 mm chrome steel balls - CARTRIDGE SHELL: accepts all standard stereophonic or monophonic cartridges. Plugs into arm. Secured by twist-lock. Open front permits visible location of stylus in grooves. 4-wire construction, factory installed lugs - STATIC BALANCE: acoustically isolated counterweight - DYNAMIC BALANCE: exclusive Omni-balance provides perfect dynamic (lateral) balance with any cartridge - RESONANCE: below audibility - varies from 9 - 12 cycles depending on cartridge - VERTICAL HEIGHT ADJUSTMENT: permits setting tonearm parallel to record surface - STANDARD PLUGS: Standard phono plugs connect directly to each stereo channel. Cables are color-coded. Spade lug for separate ground connection to chassis of pre-amplifier. 100% shielding for lowest possible hum level.

## Model 410 - 12" Stereo Tone Arm

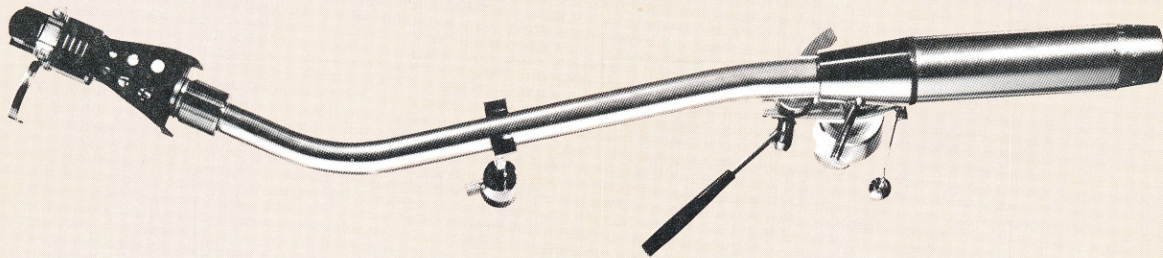

\*Tracks as low as 1/2 gram without skipping grooves \* Designed to work with modern, highly compliant, light-tracking cartridges \* When used with modern cartridge - will not wear records \* Ruggedly built of high strength alloys \* Excellent cueing visibility \* Separate horizontal and vertical pivots with stops \* Easy, one-hole mounting with pivots and rest heights adjustable \* Statically Balanced - no springs. Loading easily adjustable by sliding counterweights \* Gravity Loading assures tracking on warped records \* Tracking adjustment with calibrated control \* Removable head for fast cartridge installation \* Provided with audio cord with matching 5-connector plug \* Extralength and careful design minimizes lateral tracking error - Max. error 1.25 degrees \* Cartridge head can accommodate all standard and majority of non-standard cartridges \* No exposed audio leads - maximum shielding \* Stylus not affected by stiffness or dress of audio cable.

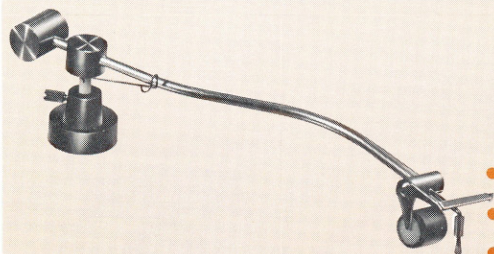

## Model DC-1A Disc Cleaner

- Maintains Records in Original Condition
- Increases Disc and Cartridge Life
- No Mounting Holes Required
- Improves Fidelity of Reproduction
- Comparatively Inexpensive

A Subsidiary of CCA Electronics Corp.



1568 NORTH SIERRA  
VISTA AVE / FRESNO,  
CALIFORNIA 93703

EXPORT SALES: Telesco International Corporation \* 1044 Northern Blvd. \* Roslyn, L. I., New York 11576  
CANADIAN SALES: Caldwell A/V Equip. Co. Ltd. \* 1080 Bellamy Road North \* Scarborough, Ontario



# USERS PRICE LIST

## TURNTABLES - 12"

Model B-12H (Sync.)	\$179.50
Model B-12HS - (System with Tone Arm, Cartridge and Base)	225.00
Model B-12H-4 (4 Pole)	159.50
Model CVS-12 (Var. Speed)	169.50
Model CVS-12S (System with Tone Arm, Cartridge and Base)	225.00
Model B-1271 (Sync.)	189.50

## STEREO TONE ARMS

S-320 12" Arm	\$49.50
S-260 16" Arm	54.95
PS-20L - Cartridge Shell	9.95

## WALNUT BASES

BH - Shelf Type	\$24.95
FBH - Free Standing	149.50

## CARTRIDGE STEREO

QRK - Model F3	\$29.95
Replacement Stylus	9.95

## EQUALIZED PRE-AMPLIFIER

QRK - Ultimate I - Mono	\$139.50
QRK - Ultimate II - Stereo	189.50

## REK-O-THANE BELTS

RBL (for K-34, K34H, L-33H, N-33, N-33H, N34H, R-2, R-320, R320A and R-33)	\$6.95
RBS (for K33, K33H, R-33 and R-34)	6.95

## DISC CLEANER

Model DC-1A	\$29.95
-------------	---------

**A \$50.00 trade in allowance for your old QRK or Rek-O-Kut turntable will be given with the purchase of any new QRK or Rek-O-Kut turntable.**

JUNE 1971



1568 NORTH SIERRA VISTA, FRESNO, CALIF. 93703 • Phone: 209 251-4213

A Division of CCA Electronics Corp. Gloucester City, New Jersey 08030