

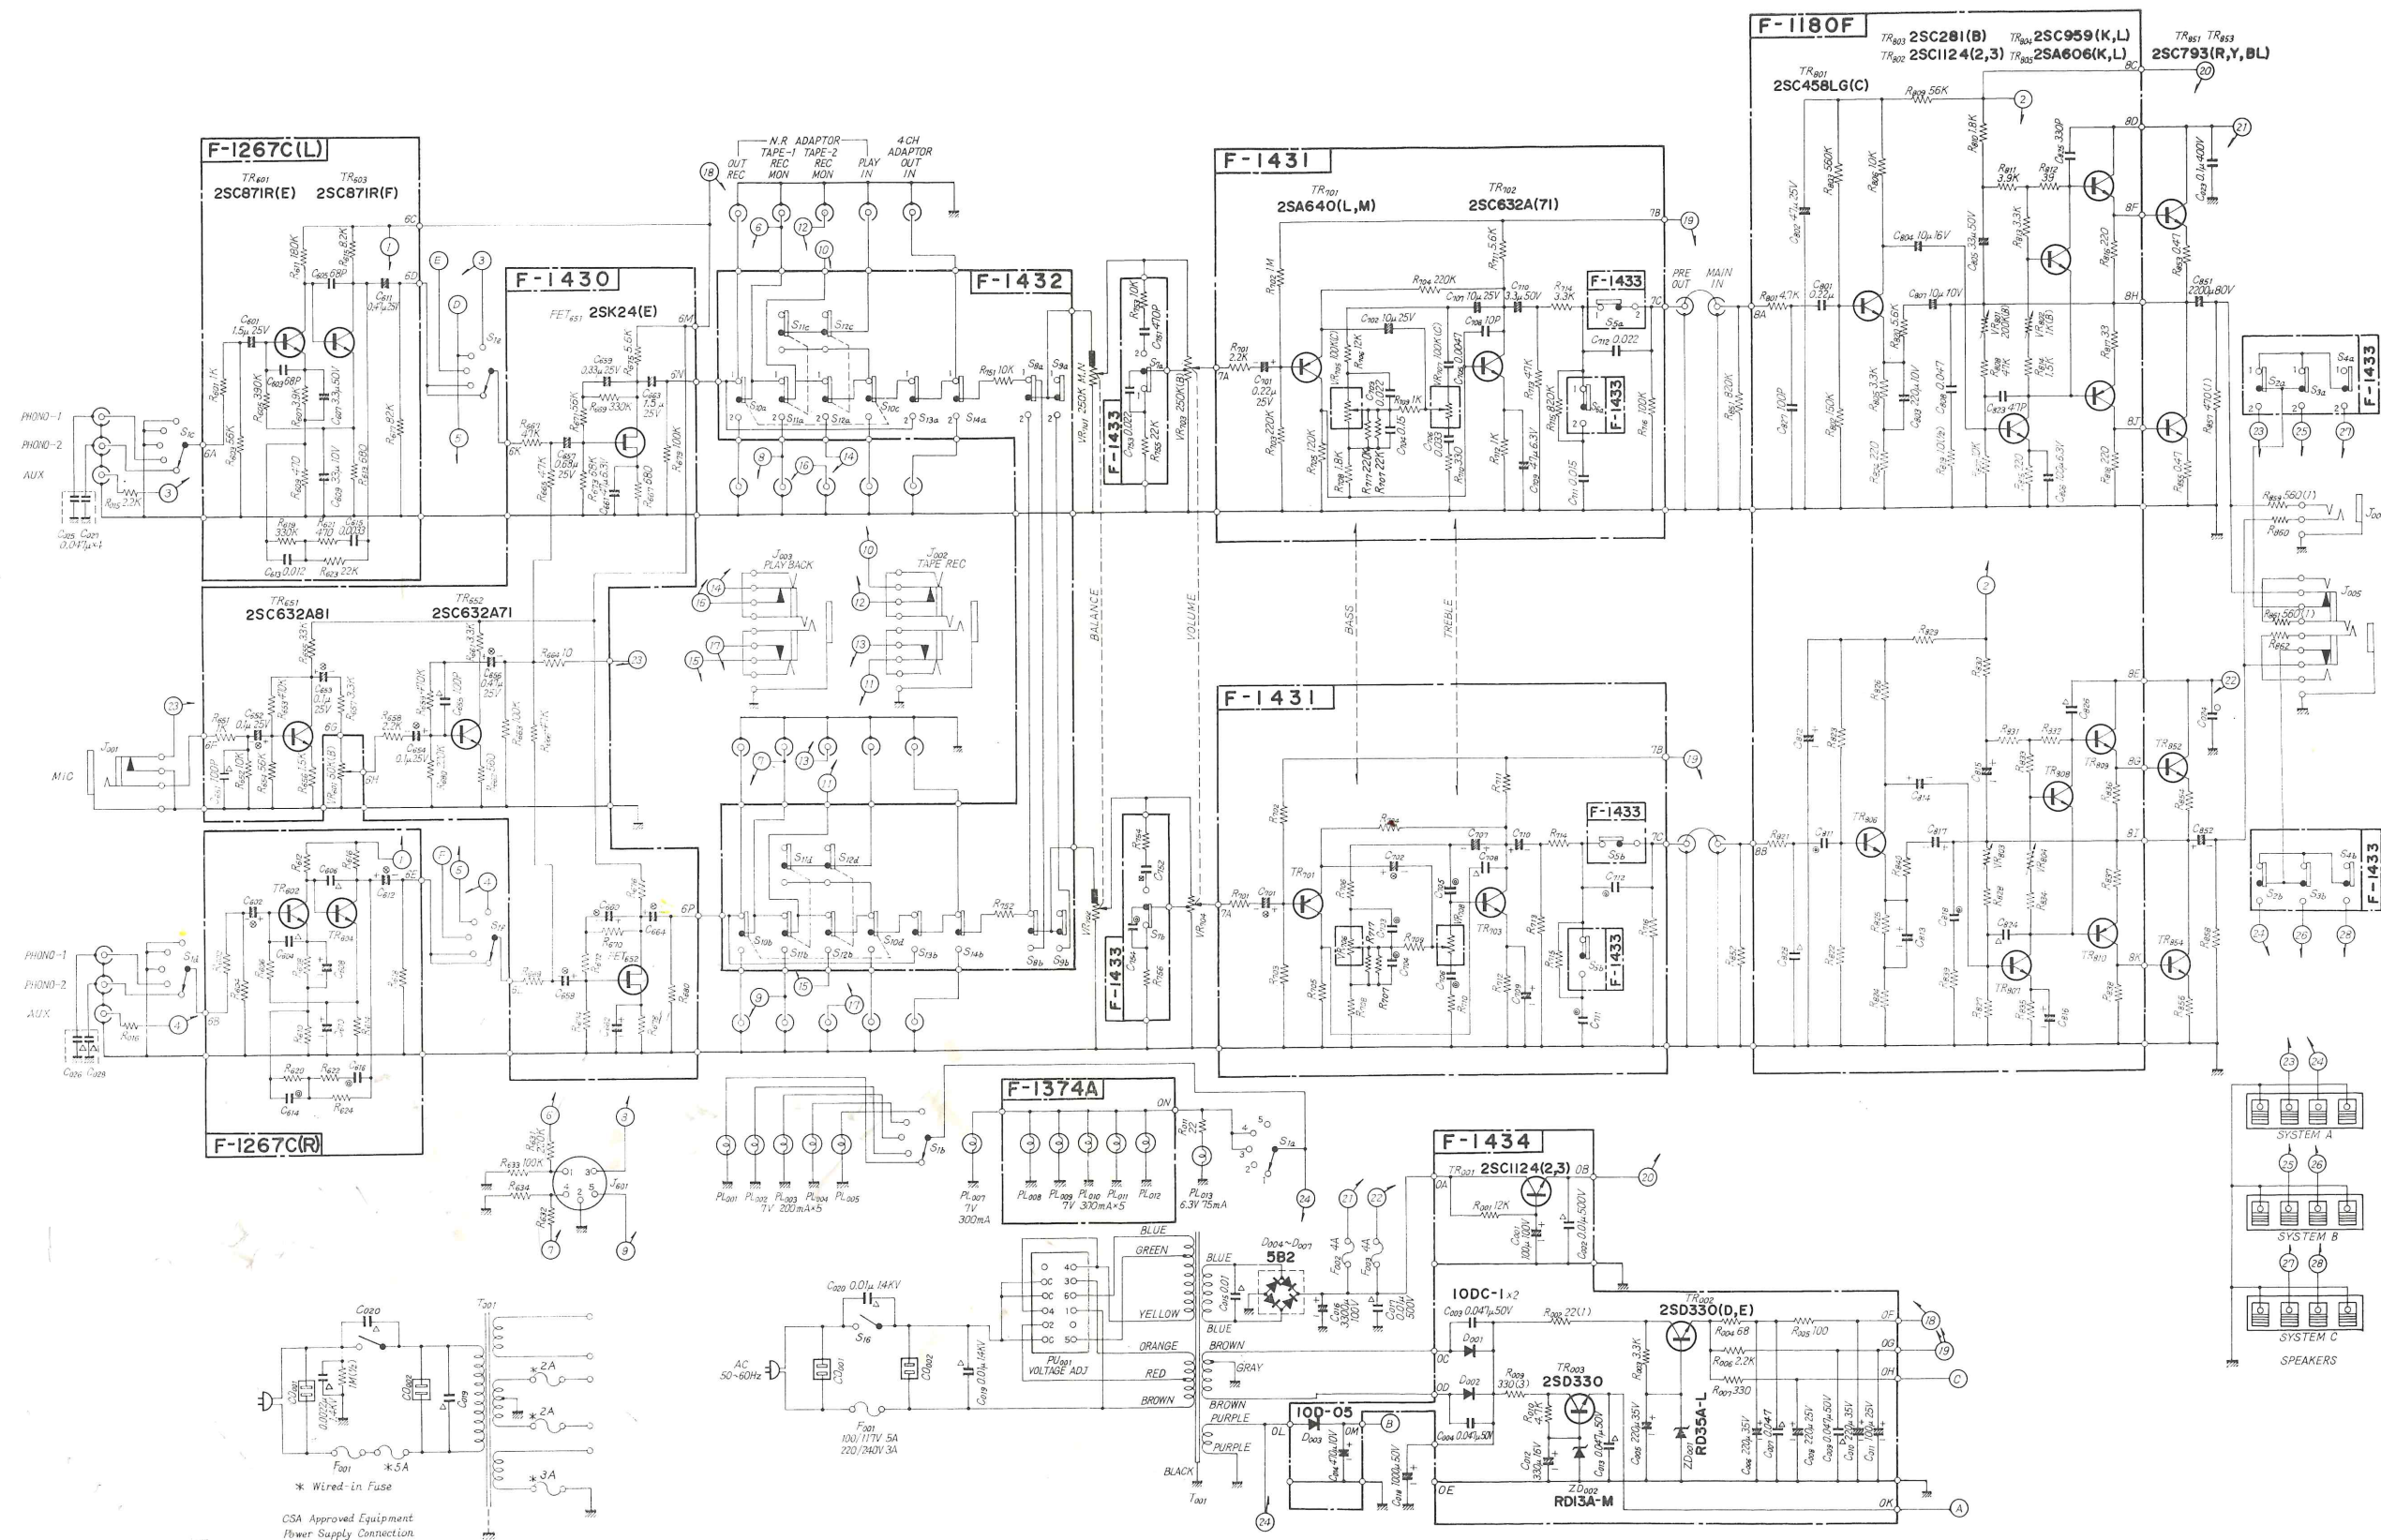


# SCHEMATIC DIAGRAM OF AMPLIFIER SECTION

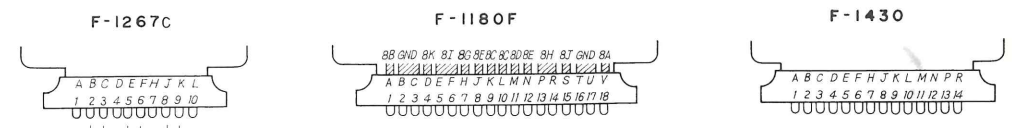

\* Wired-in Fuse  
CSA Approved Equipment  
Power Supply Connection

# SCHEMATIC DIAGRAM OF TUNER SECTION

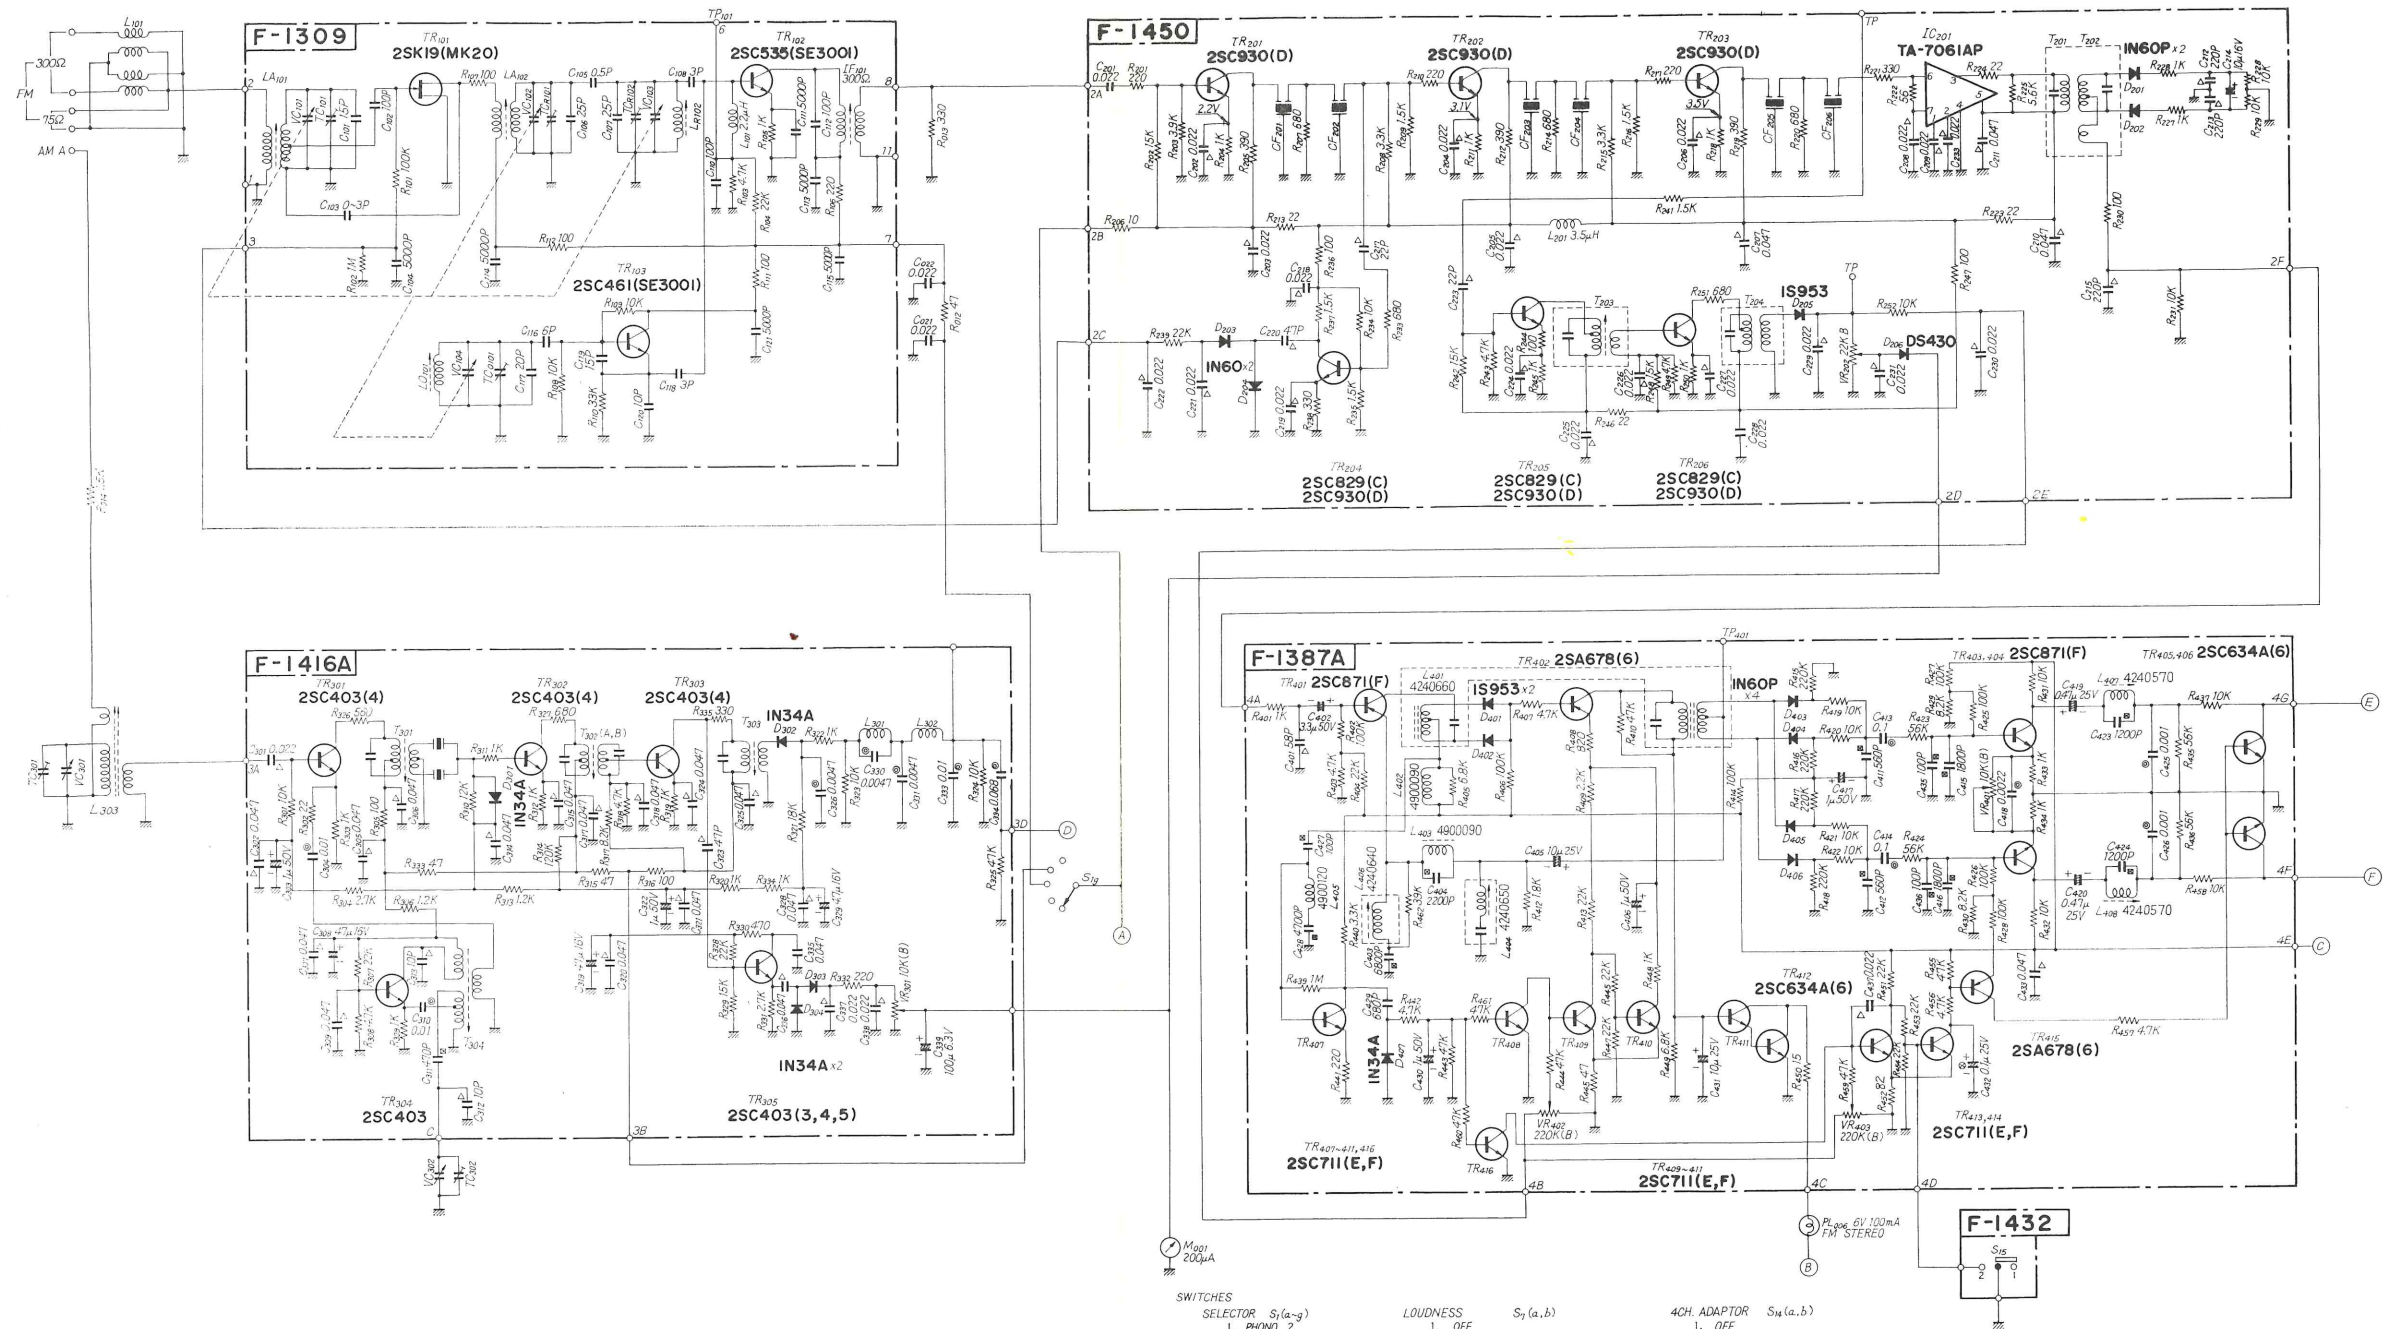

LEFT OUTPUT  
GROUND  
LEFT INPUT  
+8 30V  
RIGHT INPUT  
GROUND  
RIGHT OUTPUT

- SWITCHES**
- SELECTOR S<sub>1</sub>(a-g)
    - PHONO 2
    - PHONO 1
    - FM AUTO
    - AM
    - AUX
  - SPEAKERS A S<sub>2</sub>(a,b)
    - OFF
    - ON
  - SPEAKERS B S<sub>3</sub>(a,b)
    - OFF
    - ON
  - SPEAKERS C S<sub>4</sub>(a,b)
    - OFF
    - ON
  - LOW FILTER S<sub>5</sub>(a,b)
    - OFF
    - ON
  - HIGH FILTER S<sub>6</sub>(a,b)
    - OFF
    - ON
  - LOUDNESS S<sub>7</sub>(a,b)
    - OFF
    - ON
  - REVERSE S<sub>8</sub>(a,b)
    - NORMAL
    - REVERSE
  - MONO S<sub>9</sub>(a,b)
    - OFF (STEREO)
    - ON (MONO)
  - NOISE REDUCTION ADAPTOR S<sub>10</sub>(a-d)
    - OFF
    - ON
  - TAPE MONITOR 1 S<sub>11</sub>(a-d)
    - OFF
    - ON
  - TAPE MONITOR S<sub>12</sub>(a-d)
    - OFF
    - ON
  - SOURCE S<sub>13</sub>(a,b)
    - OFF
    - ON
  - 4CH. ADAPTOR S<sub>14</sub>(a,b)
    - OFF
    - ON
  - FM MUTING OFF S<sub>15</sub>
    - ON
    - OFF
  - POWER S<sub>16</sub>
    - ON
    - OFF
- CAPACITORS**
- ▲ CERAMIC
  - MYLAR
  - STYROL
  - OIL
  - ⊙ Tantalum