


SANSUI AU-7900 SCHEMATIC DIAGRAM

* La présentation et les spécifications sont susceptibles d'être modifiées sans préavis par suites d'améliorations éventuelles.
 * Änderungen, die dem technischen Fortschritt dienen, bleiben vorbehalten.
 * Design and specifications subject to change without notice for improvement.
 * 改良のため、予告なく変更、仕様の一部を変更することがあります。

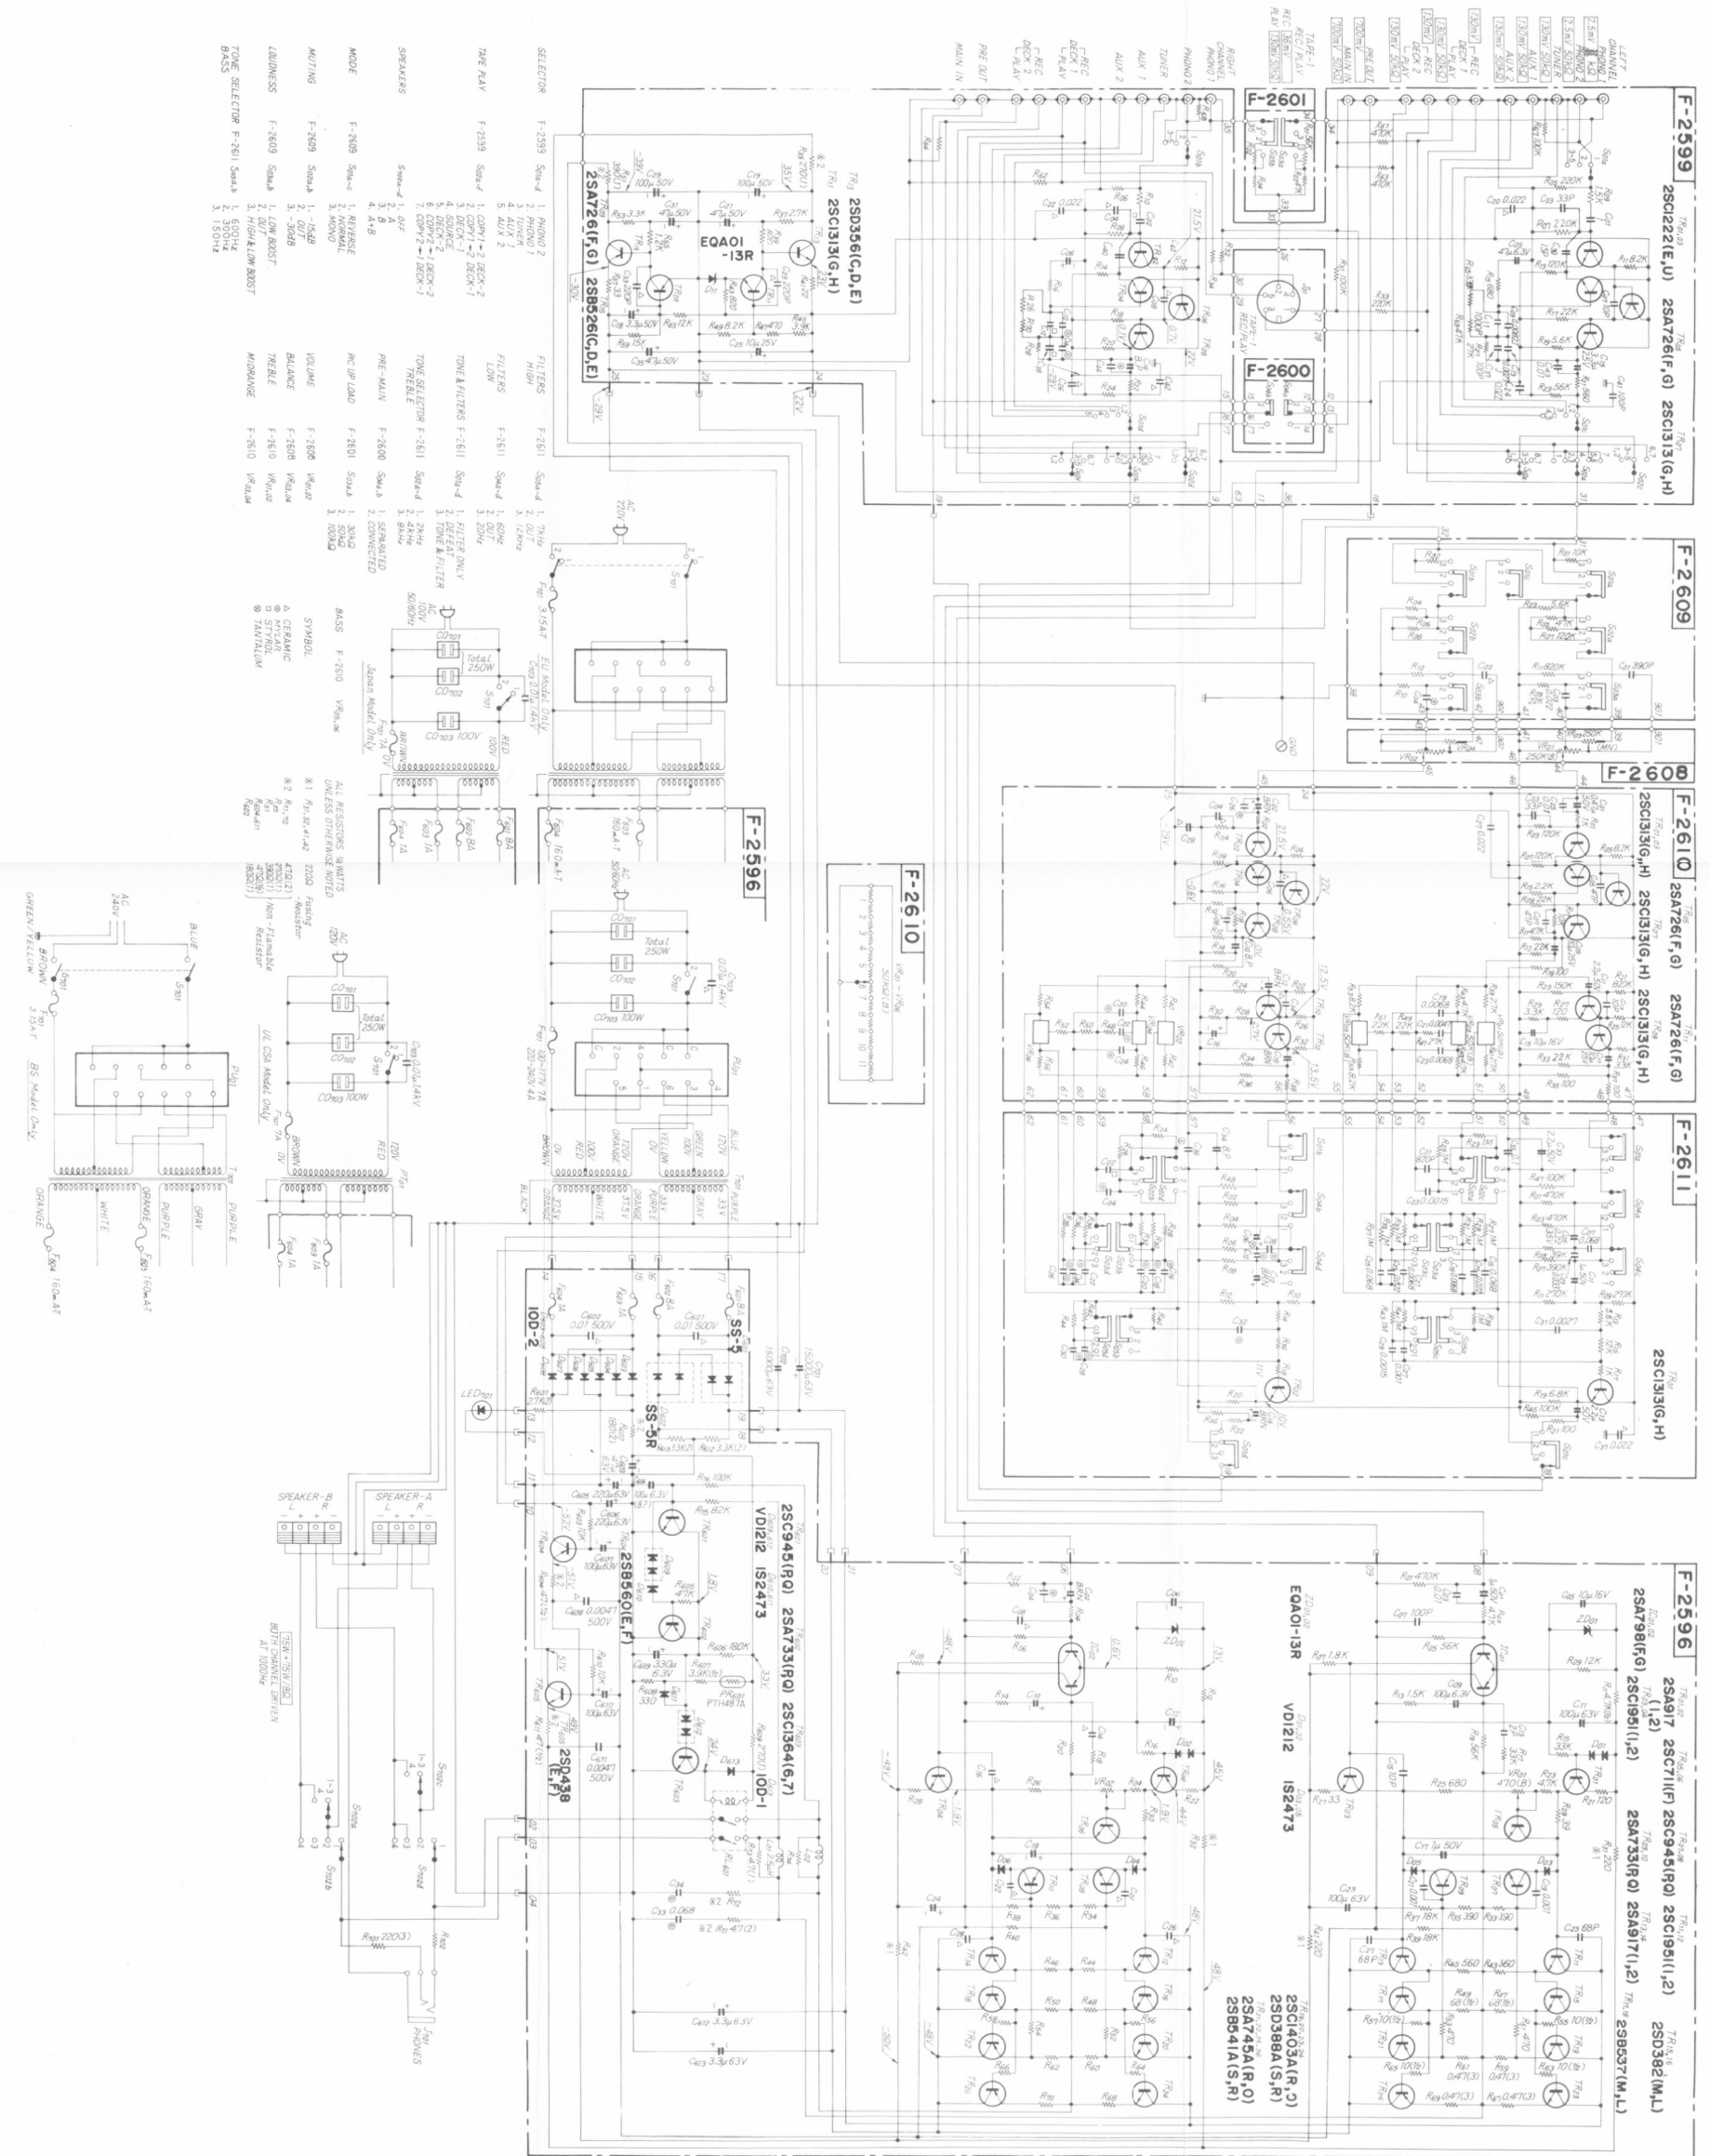

- SELECTOR**
- F-2599 Sw-4 1. PHONO 2
 - 2. TUNING 7
 - 3. TUNING 4
 - 4. TUNING 5
 - 5. AUX 2
- TUNE RAY**
- F-2599 Sw-4 1. COPY-1 2. DECK-1
 - 2. COPY-2 3. DECK-2
 - 3. DECK-1 4. DECK-2
 - 4. COPY-1 5. DECK-1
 - 5. COPY-2 6. DECK-2
- SPEAKERS**
- Sw-4 1. A
 - 2. B
 - 3. A+B
 - 4. A+B
- MODE**
- F-2598 Sw-4 1. REFERENCE
 - 2. TUNING 7
 - 3. TUNING 4
 - 4. TUNING 5
- MUTING**
- F-2609 Sw-4 1. -50dB
 - 2. -20dB
 - 3. -50dB
- LOUDNESS**
- F-2609 Sw-4 1. LOW BOOST
 - 2. -50dB
 - 3. HIGH/Low BOOST
- TONE SELECTOR F-2611 Sw-4**
- 1. 600Hz
 - 2. 300Hz
 - 3. 150Hz

- FILTERS**
- F-2611 Sw-4 1. TUNE 7
 - 2. OUT 1. 600Hz
 - 3. 150Hz
- FILTERS**
- F-2611 Sw-4 1. 600Hz
 - 2. OUT 1. 600Hz
 - 3. 150Hz
- TONE & FILTERS F-2611 Sw-4**
- 1. FILTER ONLY
 - 2. TUNE & FILTER
 - 3. 150Hz
 - 4. 600Hz
- PRE-MAIN**
- F-2610 Sw-4 1. SEPARATED
 - 2. COMBATED
- AC UP/LD**
- F-2610 Sw-4 1. 50V
 - 2. 100V
 - 3. 100V
- VOLUME**
- F-2608 W-6A 1. 50dB
 - 2. 100V
 - 3. 100V
- TREBLE**
- F-2610 W-6A 1. 50dB
 - 2. 100V
 - 3. 100V
- MIDRANGE**
- F-2610 W-6A 1. 50dB
 - 2. 100V
 - 3. 100V

