

NOTES:


SERIAL NO. K310001 AND UP.

*Match within 1%. All resistors are 1/2 watt, ±10% tolerance unless otherwise specified. All fractional-valued capacitors are in µf and are 400v. molded paper; other capacitors, except electrolytics, are in µf and are mica or ceramic.

Notation	Multiplier
K	1000
M	1,000,000
µ	1/1,000,000

DC voltages are measured with VTVM and are with 120v. power source. Voltages shown in parenthesis are rms. mid-frequency sensitivities for 20 watts output with tone controls at flat and loudness and level controls at maximum. Selector and Function switches are shown in their most counter-clockwise (tape and STEREO) positions.

SHERWOOD MODEL S-5500 III

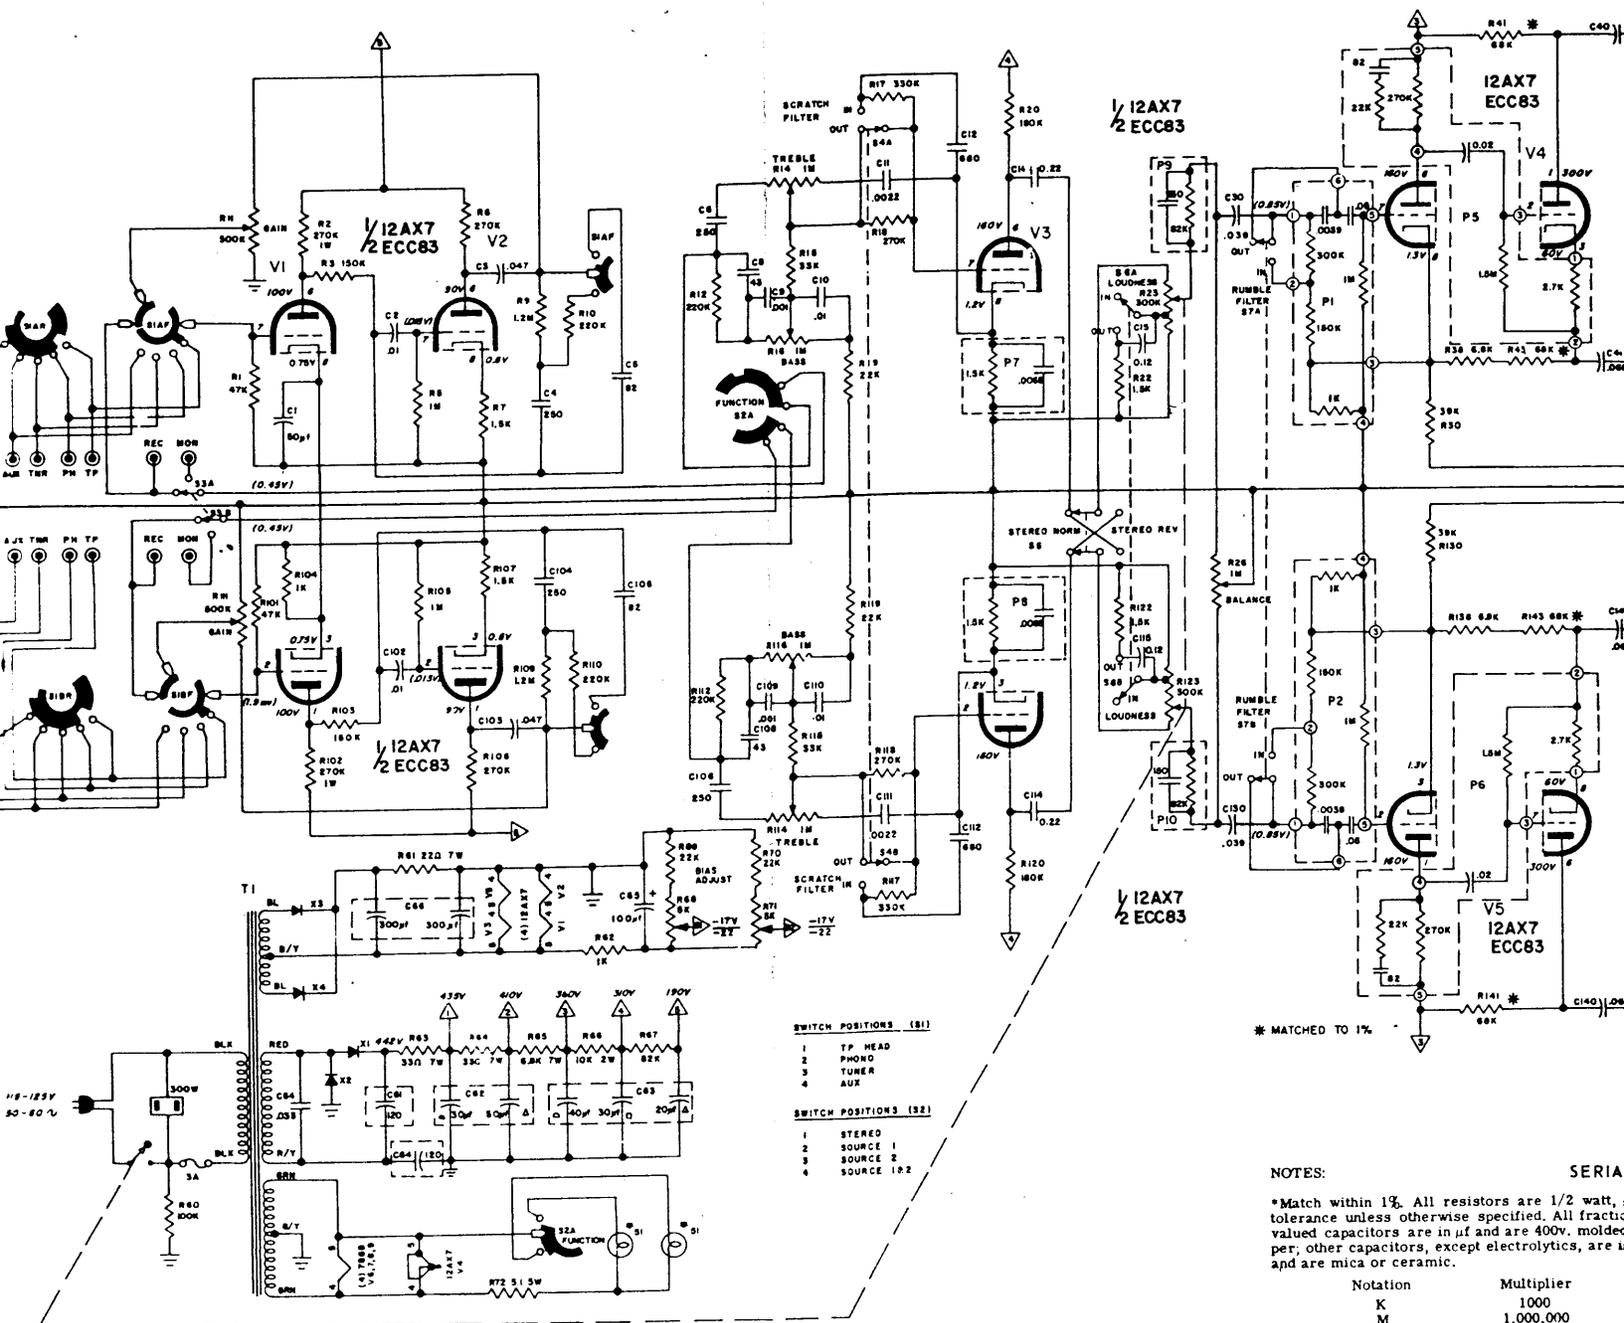


- SWITCH POSITIONS (S1)
- 1 TP HEAD
 - 2 PHONO
 - 3 TUNER
 - 4 AUX
- SWITCH POSITIONS (S2)
- 1 STEREO
 - 2 SOURCE 1
 - 3 SOURCE 2
 - 4 SOURCE 1&2

NOTES: SERIAL

*Match within 1%. All resistors are 1/2 watt, tolerance unless otherwise specified. All fractional valued capacitors are in μ f and are 400v. molded per; other capacitors, except electrolytics, are μ and are mica or ceramic.

Notation	Multiplier
K	1000
M	1,000,000
μ	1/1,000,000

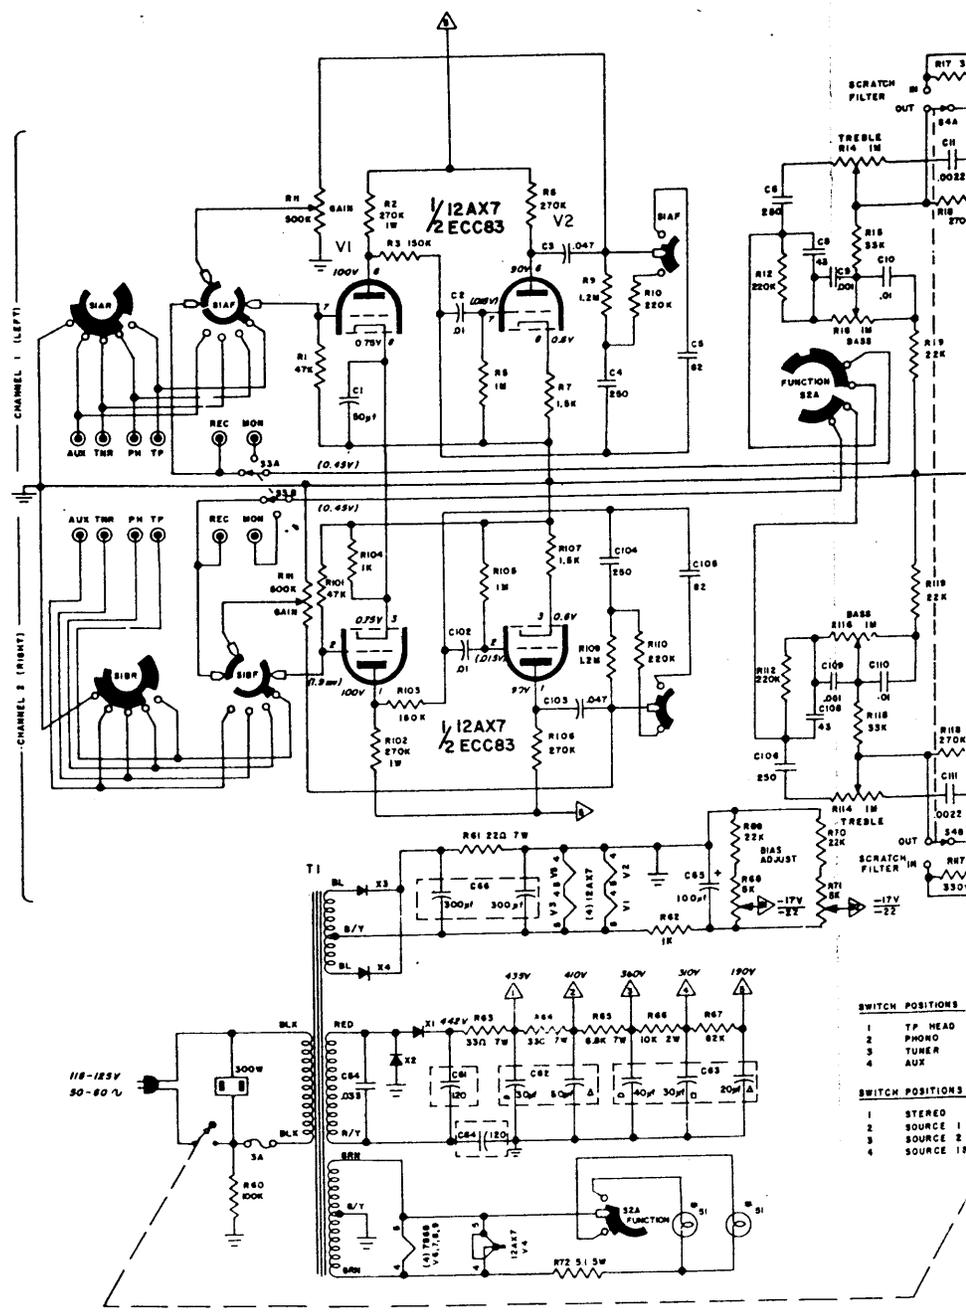

- SWITCH POSITIONS**
- 1 TP HEAD
 - 2 PHONO
 - 3 TUNER
 - 4 AUX
- SWITCH POSITIONS**
- 1 STEREO
 - 2 SOURCE 1
 - 3 SOURCE 2
 - 4 SOURCE 1 & 2

COURTESY OF SHERWOOD ELECTRONIC LABORATORIES, INC.